




fabric
signature

Bandshell.

The Bandshell is made for performance and crowds. The circular footprint and clear span area provides unrivalled space for memorable occasions. Lighting and sound system friendly.



Typical applications

- Performance area
- Shaded focal point
- Feature structure
- Outdoor classroom
- Meet and greet shelter

Specification.

Steel work can be increased to withstand extreme loads caused by any specific local weather conditions (snow, wind).

Drainage: Hoppers with internal drainage through leg column. Foundation drainage design available.

Wind rating: BS 6399 part 1, 2, 3
(50 year storm calculated by UK location)

Snow loading: BS 6399 part 1, 2, 3
(50 year storm calculated by UK location)

Fire rating: M2 / B1 / BS 7837, B-s2, d0
(class 0 / A2 fabric available on request)

Waterproof: Yes

Expected design life: 20+ years

Foundations: Simple structural reinforced concrete

Accessories available: Post protector, lighting, heat via third-party suppliers




Maintenance: Virtually maintenance free. Simple clean and maintenance check every two years.

Installation: 3-4 days subject to site location and site restrictions.

Supporting steel and framework: Mild steel legs certified with CK and UKCA. Galvanised or/and powder coating to any RAL colour. Marine grade (316) stainless steel fittings.

Accreditations: Canopy complies with ISO 9001 standard

Note: All canopies installed by Fabric Architecture will receive a 10 year warranty.

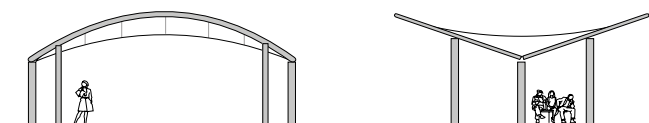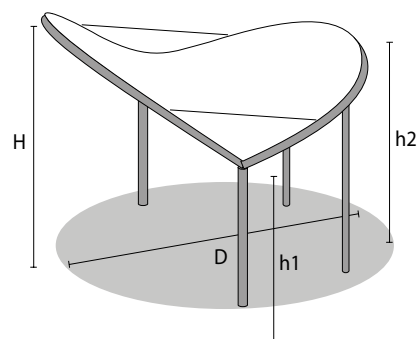

Dimensions

	Type 1 / Type 2	Recommended Material	L	W	H1	H
6m diameter	PVC Type 2	Sedo Gamma 12	6m	2.2m	3.3m	4.1m
10m diameter	PVC Type 2	Sedo Gamma 12	10m	2.7m	4.2m	5.2m